



03 MAY 2005  
PCT/GB 2003 / 0 0 4 8 1 8



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 29 DEC 2003

WIPO PCT

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Dated

17 December 2003

**Best Available Copy**

Patents Act 1977  
(Rule 16)

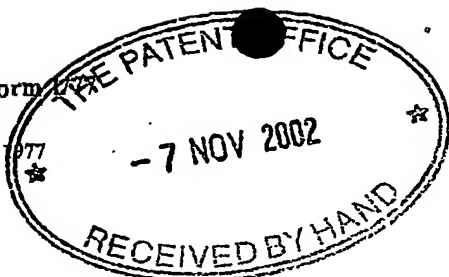

# The Patent Office

08NOV02 E761844-13 D01038  
P01/7700 0.00-0226006.5

The Patent Office  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

07 NOV 2002

1. Your reference		P303156GB/47998	
2. Patent application number (The Patent Office will fill in this part)		0226006.5	
3. Full name, address and postcode of the or of each applicant (underline all surnames)		Ambi-Rad Limited Fens Pool Avenue Wallows Industrial Estate Brierley Hill West Midlands DY5 1QA United Kingdom	
Patents ADP number (if you know it)			
If the applicant is a corporate body, give the country/state of its incorporation		United Kingdom	
4. Title of the invention		An Indirect Heater Assembly	
5. Name of your agent (if you have one) "Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)		WITHERS & ROGERS Goldings House 2 Hays Lane London SE1 2HW	
Patents ADP number (if you know it)		1776001	
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))			
YES			

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 10

Claim(s)

Abstract

Drawing (s) 6

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

Witherspoon 7/11/2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Dave Croston

0121 245 3900

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least six weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500 505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

P303156GB

# An Indirect Heater Assembly

The present invention relates to an indirect heater assembly.

Indirect heaters, such as radiant tube heaters are known, and comprise a burner tube located within a heater tube. A mixture of fuel and air is supplied to the burner tube where it is mixed, and emerges via a burner head where it is ignited so as to produce a flame inside the heater tube. The gas in the heater tube increases in temperature thereby creating a hot tube which radiates heat to the surroundings. The heater tube includes a fan located at one end which draws or blows air along the tube so as distribute hot air along the length of the tube.

Traditionally, direct fired mobile heaters are used which ignite fuel and air in an open tube so as to produce a flame and heat the surroundings. This type of heater suffers from safety issues such as having an exposed naked flame, and the fact that the combustion products such as carbon monoxide and dioxide are dangerous and cannot be controlled. Thus using exposed naked flame heaters is not always desirable, especially where occupants of the installation are situated near the heater, and the risks of condensation need to be minimised.

What is needed is an indirect fired heater, such as a radiant tube type, which avoids the safety problems of traditional direct fired heaters.

Thus according to the present invention there is provided an indirect heater assembly comprising a radiant tube heater, and air flow generating means arranged to generate an air flow over the radiant tube heater so as to provide convected heating.

Advantageously this provides a flow of hot air to the surrounding area which is more easily directed than radiant heat provided by conventional direct fired heaters and heats ambient air rather than surfaces.

Preferably the heater assembly is located within a housing. That prevents user contact with the hot radiant tube heater.

The housing preferably has a wall around the radiant tube heater so as to constrain the air flow over the tube heater, the wall defining an air flow pathway over the heater and an outlet to direct the hot air to the surroundings. That provides an enclosed area in which the air passes more closely over the heater thereby heating the air more efficiently. The outlet enables the hot air to be directed in a particular direction.

The housing may further include a heating duct which is connected to the outlet so as to direct hot air to a particular part of the surroundings.

In one embodiment the radiant tube heater comprises an elongate tube. Typically the elongate tube is made from stainless steel to withstand the high temperatures in the tube.

In another embodiment the indirect heater assembly comprises a spiral tube provided at an end of the radiant tube heater. The spiral tube preferably comprises a straight portion and a spiral portion downstream of the straight portion and arranged around the straight portion, most preferably substantially coaxially around the straight portion.

This provides several advantages. Firstly more surface area of heater tube is provided for a given overall heater assembly length, thereby producing more efficient heating of air. Secondly, since the spiral portion is arranged around the straight portion, air inside the spiral portion is heated by heat radiating from the straight portion of the spiral tube, and thus air passing over the spiral portion is heated more efficiently.

The radiant tube heater is preferably connected to the straight portion of the spiral tube by a U-shaped tube. The U-shaped tube enables the heater and the spiral tube to be housed in a compact manner. Also, the burner can be held remote from the airflow over the spiral tube which improves performance.

The spiral portion is made from a flexible material to enable it to be wrapped around the straight portion.

The straight portion may be connected to the spiral portion by a suitable joint to provide an air tight seal. Alternatively the spiral portion may be connected directly to the spiral portion with no need for a joint, thereby reducing the number of parts.

Air flow generating means preferably comprises an impeller to draw air over the radiant heater tube or to blow air over the radiant heater tube. The air flow generating means may be located on the assembly or on the housing.

The joint between the spiral portion and the straight portion is preferably positioned near the air flow generating means. Thus the joint remains sufficiently cool to prevent damage to the material.

In one embodiment the assembly includes means for moving the products of combustion from the heater tube. Preferably the means includes an exhaust duct located in fluid communication with the heater tube so as to direct gaseous combustion products away from the surrounding environment. More preferably the exhaust duct is located at an open end of the heater tube. This means that the exhausted gas is cooler, and avoids exhausting hot gas from the tube which could otherwise be used to heat up the air flow over the tube. Including an exhaust duct is particularly suitable for use with a heater with a spiral tube, since the hot gas has travelled further along the tube, and is consequently cooler.

The housing can include wheels located at one or both ends, to enable it to be easily transported within a working environment to wherever heat is required. The use of a spiral tube enables a more compact heater to be created, and thus makes it easier to transport.

In a preferred form of radiant tube heater a mesh burner head is provided. Compared to known burner heads, the mesh provides a shorter flame, and thus enables shorter tubes to be used without the end of the tube being impinged by the flame.

Preferably the assembly includes a fresh air inlet duct which supplies air to the radiant tube heater. This is advantageous in dusty or combustible environments.

Whilst generating a flow of air over a radiant tube heater provides a more effective means of heating surroundings, there are some situations where a radiant tube heater is still desirable. For example, in a dusty environment, a flow of hot air is not particularly welcome. However, known radiant tube heaters either do not produce a sufficient quantity of radiant heat, or to produce enough heat, require a longer tube to increase the surface area from which heat can radiate. Even when a longer tube is used, the gas inside the tube becomes progressively cooler as it travels through the tube, and thus an insufficient quantity of heat can be produced.

Another object of the present invention is to provide an improved radiant tube heater.

According to a second aspect of the present invention there is provided a radiant tube heater, the heater having a heater tube, the tube having a straight portion and a spiral portion arranged around the straight portion.

The above arrangement provides several advantages. Firstly, more surface area of heater tube is provided for a given length of radiant tube heater, thereby producing an increased surface area to radiate heat. Secondly, since the spiral portion is around the straight portion, air inside the spiral portion of the tube is heated by heat radiating from the straight portion of the heater tube.

Most preferably, the spiral portion is arranged substantially co-axially around the straight portion. That means that the spiral portion is heated substantially uniformly by the straight portion.

Several of the preferred features of the first aspect of the invention equally apply to the second aspect of the invention.

Preferably the assembly includes an exhaust duct located in fluid communication with the heater tube so as to direct gaseous combustion products away from the surrounding environment. More preferably the exhaust duct is located at an open end of the heater tube. This means that the exhausted gas is cooler, and avoids exhausting hot gas from the tube

which would otherwise radiate to the surroundings. Including an exhaust duct is particularly suitable for use with a heater with a spiral tube, since the hot gas has travelled further along the tube, and is consequently cooler.

The heater can include means, for example wheels located at one or both ends, to enable it to be easily transported within a working environment to wherever heat is required. Again, the use of a spiral portion in the tube enables a more compact heater to be created, and thus makes it easier to transport.

In a preferred form of radiant tube heater a mesh burner head is provided. Compared to known burner heads, the mesh provides a shorter flame, and thus enables shorter tubes to be used without the end of the tube being impinged by the flame.

The invention will now be described by way of example only with reference to the accompanying drawings in which:

Figure 1 is a side view of an indirect heater assembly according to a first aspect of the present invention,

Figure 2 is an end view of the indirect heater assembly of figure 1,

Figure 3 is a side cross-sectional view of a known indirect heater,

Figure 4 is a perspective view of part of the indirect heater assembly of figure 1,

Figure 5 is a perspective view of the indirect heater assembly of figure 1 located within a housing, and

Figure 6 is a side view of a radiant tube heater according to a second aspect of the present invention.



In figures 1 to 5, an indirect heater assembly 10 comprises a radiant tube heater 12 and air generating means in the form of a fan 14.

One example of a radiant tube heater is that described in our co-pending European patent application EP1217294. The radiant tube heater 12 (figure 3) comprises a radiant tube burner 14 arranged substantially co-axially within an elongate tube 16. The tube 16 has an external surface 17. Fuel is supplied to a mixing tube 18 via a nozzle 20 which is connected to a fuel supply (not shown).

The heater 12 has an orifice plate 22 which includes primary air inlet means in the form of a first set of holes 24 to supply substantially turbulent air to the mixing tube 18, and a secondary air inlet means in the form of a second set of holes 26 to supply substantially non-turbulent air to a second tube 28, the second tube arranged around the mixing tube and having a larger diameter. Air is supplied under pressure by drawing air using an impeller 30 located downstream of the burner. Alternatively air could be supplied by blowing air using a fan upstream of the orifice plate 22. In other embodiments air is supplied to the second tube via a fresh air inlet duct D (shown in figures 1 and 3) which is particularly suitable for dusty or combustible environments. Air and fuel entering the mixing tube 18 is mixed upstream of a burner head 32 due to the turbulent air flow. The air/fuel mix emerges from the burner head 32 and is ignited by an ignition device 34 to produce a flame. The substantially non-turbulent air emerging from the second tube 28 promotes the long flame shown in figure 3. Thus the tube 16 contains hot gas. To withstand the temperatures of the hot gas, the tube is made from a suitable heat resistant material, for example, stainless steel. Typically the diameter of the tube is 100 mm (four inches).

The assembly includes a spiral tube 23 (figure 4) which is connected to the elongate tube 16 by a U-shaped tube 25. A fitting 27, which is gas tight, connects the elongate tube 16 to one end of the U-shaped tube 25. The U-shaped portion has a surface 43.

The spiral tube has an straight portion 29 and a spiral portion 31. The U-shaped tube 25 is connected to one end of the straight portion by a similar gas tight fitting 27. The other end of the straight portion 29 is connected to the spiral portion by a joint in the form of an

elbow 33. In other embodiments the straight portion is connected directly to the spiral portion. The spiral portion has a surface 45 and the straight portion has a surface 47. The elongate tube 16 has a length L which is sufficient to contain the flame generated by the burner and prevent the flame from impinging on the U-shaped tube. Typically the straight and spiral portions are 75 mm (3 inches) in diameter.

The spiral portion 31 is made from a flexible material to enable it to be wrapped around the straight portion 29. No combustion takes place inside the spiral portion 31 and therefore use of high temperature resistant materials such as steel is not necessary.

The spiral tube is mounted onto a frame 19, and the frame 19 is housed within a housing 36. The housing has an elongate hollow cylindrical portion 38 with an outer wall 40, and annular flanges 42 extending therefrom. The frame 19 is secured to the annular flanges 42 such that the spiral tube 23 and the cylindrical portion of the housing are substantially coaxial, and an enclosed space 44 is created between the heater 12 and the housing wall 40.

The fan 14 is positioned at and fixed to an air inlet end 46 of the housing via suitable fixings (not shown). The fan has a diameter which is slightly smaller than diameter of the cylindrical portion of the housing. The fan 14 can be electrically powered, or pneumatically powered where it is possible to utilise the air supply used to supply air to the mixing tube. It will be appreciated that the fan 14 is positioned near the elbow 33 which connects the spiral and straight portions of the spiral tube and thus the elbow is kept sufficiently cool thereby enabling the use of a material of lower heat resistance.

An air outlet end 48 of the housing has an air outlet in the form of an aperture 50 which is covered by a grill 52. The housing has a cylindrical lip 56 extending therefrom. A heating duct 58 is positionable on the lip 56 so as to direct hot air emerging from the outlet into the surroundings from its open end (not shown). Alternatively the hot air can enter the surroundings from the aperture 50 without the need for a heating duct.

The housing has a rectangular base portion 62, onto which wheels 64 locate at one end. A handle 66 is positioned on the base portion at the opposite end. The housing can be

manoeuvred using the handle and the wheels and transported to different locations. In other embodiments the housing may be fixed and not require wheels.

The open end of the spiral portion 31 is connected to an exhaust outlet 70 (see figure 2) mounted on the outer wall 40 of the housing so as to direct gaseous combustion product from the tube. An exhaust tube 72 (figure 5) is releasably connected to the exhaust outlet 70, and positioned such that its open end 74 is remote from the surrounding environment, for example, outside of the working environment. The impeller 30 is located within the spiral portion at its open end and acts to draw hot gas through the heater tube 16. Thus gas in the hot tube passes from the heater tube 16 into the spiral tube via the U-shaped tube, and into the exhaust tube 72 before exiting at its open end 74. Having an exhaust tube which is releasably connected to the housing is advantageous where the housing is mobile and the exhaust tube is fixed to the surroundings, for example to an outlet in an exterior wall.

In operation, fuel and air is supplied to the mixing tube 18 and ignited so as to produce hot gas in the tube 16. The impeller 30 draws hot gas through tube 16 and through the straight and spiral portions of the spiral tube, such that surfaces 17,45,47 become hot. With the fan operating, air flows in the direction of A into the enclosed space 44, over the hot surfaces 17,45,47 and is heated. The hot air passes over the heater due to the blowing action of the fan until it exits the housing via the outlet 50. The hot air enters the surroundings directly from the housing outlet, or where a heating duct is fitted, passes through the heating duct where it enters the surroundings at the open end of the duct. Gaseous product from the tube 16 is exhausted via exhaust tube 72.

It will be appreciated that air passing over the heater is heated in three ways; by conduction of air adjacent the surfaces 17,45,47, by convection within the enclosed space 44 as a result of the displacement of cold air which is adjacent the hot air, and by interaction with radiated heat from the surfaces 17,45,47.

In the embodiment of figure 1, air is blown over the heater by a fan positioned at one end of the housing. In another embodiment air could be drawn over the heater by an impeller located at the opposite end of the housing.

The embodiment of figure 1 uses a known type of burner head. An alternative burner head uses a mesh type material which locates at the end of the mixing tube. The mesh type material interacts with the fuel/air passing through, such that on ignition, a shorter flame is produced than with conventional burner heads. This enables a shorter tube to be used without impinging on the tube, and therefore a more compact heater assembly.

The embodiment of figure 1 relates to a particular example of a radiant tube heater. It will be appreciated that the present invention can be used with other radiant tube heaters.

The embodiment of figure 1 also houses the heater within a housing. In other embodiments it is possible to mount the fan onto the assembly and blow hot air over the heater without the need for a housing. However operation in this way is not as efficient since firstly there is no enclosed space to heat the air, and secondly there is no defined heat outlet to direct the hot air.

In an alternative embodiment, the indirect heater assembly need not include the spiral tube extending from the heater tube. In such an embodiment, air would be drawn down the tube by an impeller located at the end of the tube as opposed to the end of the spiral portion. The exhaust tube would also be located at the end of the tube.

Operation of such an alternative assembly would be similar to the embodiment of figure 1, except in this alternative embodiment the air flow comes into contact with a smaller tube surface area since there is no spiral tube. Thus to achieve the same heat output it would be necessary to make the tube of considerable length so as to increase the tube surface area, which would not be appropriate for a mobile heater. Furthermore, the spiral tube of the tube of the embodiment of figure 1 is also heated by heat radiating from the straight tube, which would not be the case if only an elongate tube were used. Such an arrangement is appropriate where a lower heat output is required.

In figure 6 a radiant tube heater 112 has features similar to the embodiment of figure 1 numbered 100 greater.

The heater 212 includes a radiant heater tube 216 as shown in figure 1, with a spiral tube 223 which extends from the tube. The heater 212 is mounted onto a frame 219, but in contrast to the embodiment of figure 1, the frame is not housed within a housing.

In contrast to the embodiment of figure 1, no air flows over the tube. Thus hot gas inside the tubes heats the surroundings by radiating from the tubes and not by the heating of air flowing over the tubes.

The housing of figure 1 would not be appropriate for this type of heater, as it would form a barrier against heat radiating from the tubes. However, some form of housing, for example a cage 290 could be used to prevent contact with the hot tubes and also allow heat radiating from the tubes to enter the surroundings unhindered.

As in the embodiment of figure 1, the heater includes an exhaust tube at the open end of the spiral portion 212 of the heater tube 216 so as to direct gaseous combustion products away from the surrounding environment.

This spiral radiant tube heater is advantageous over conventional elongate radiant tube heaters since the spiral portion provides a greater surface area of tube, thereby enabling a more compact heater to be produced. Furthermore, the spiral portion enables cooler gas to be extracted by the exhaust tubes creating a more efficient heating process.

It will be appreciated that the features described in relation to the embodiments of figure 1 can be included in this embodiment, and hence the heater can include wheels to enable it to be transported, and an alternative mesh burner head to generate a smaller flame within the tube. The spiral tube can also be included with other known radiant tube heaters.

1/6

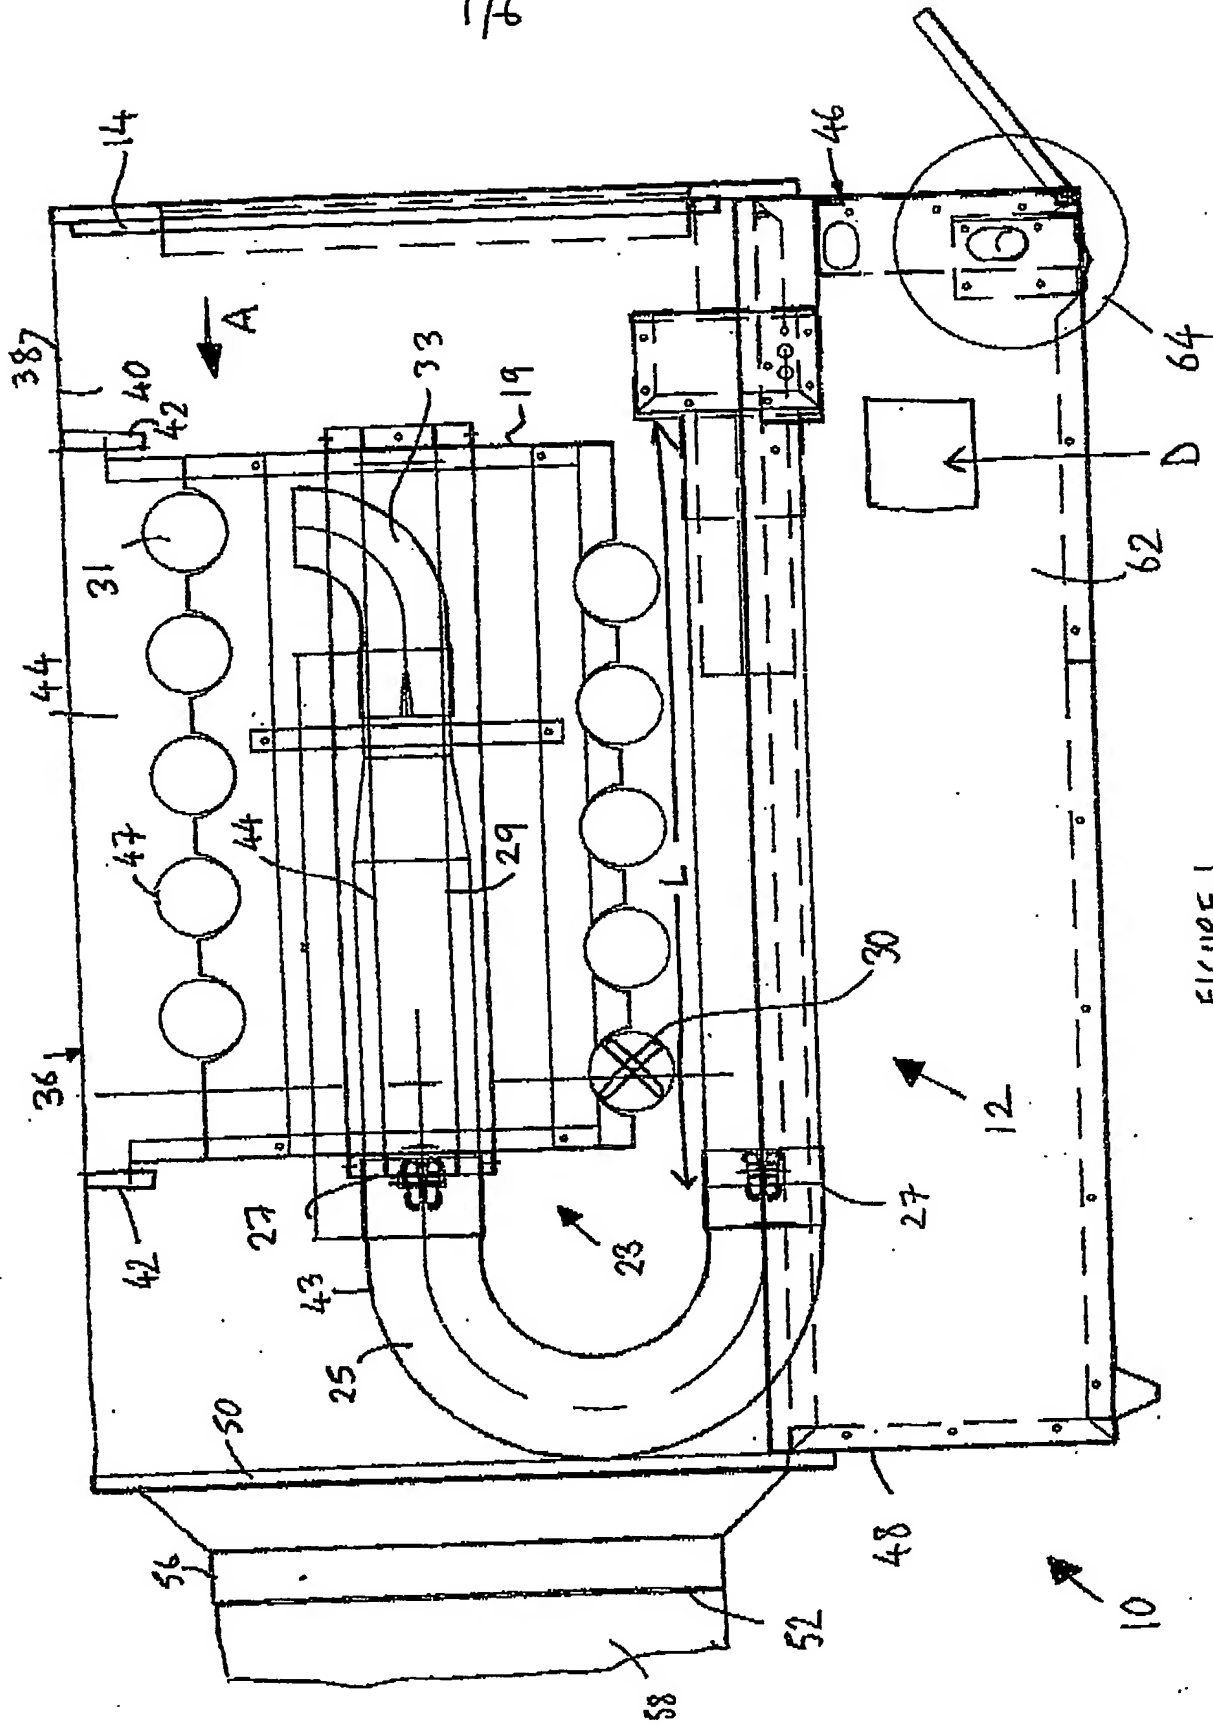


FIGURE 1

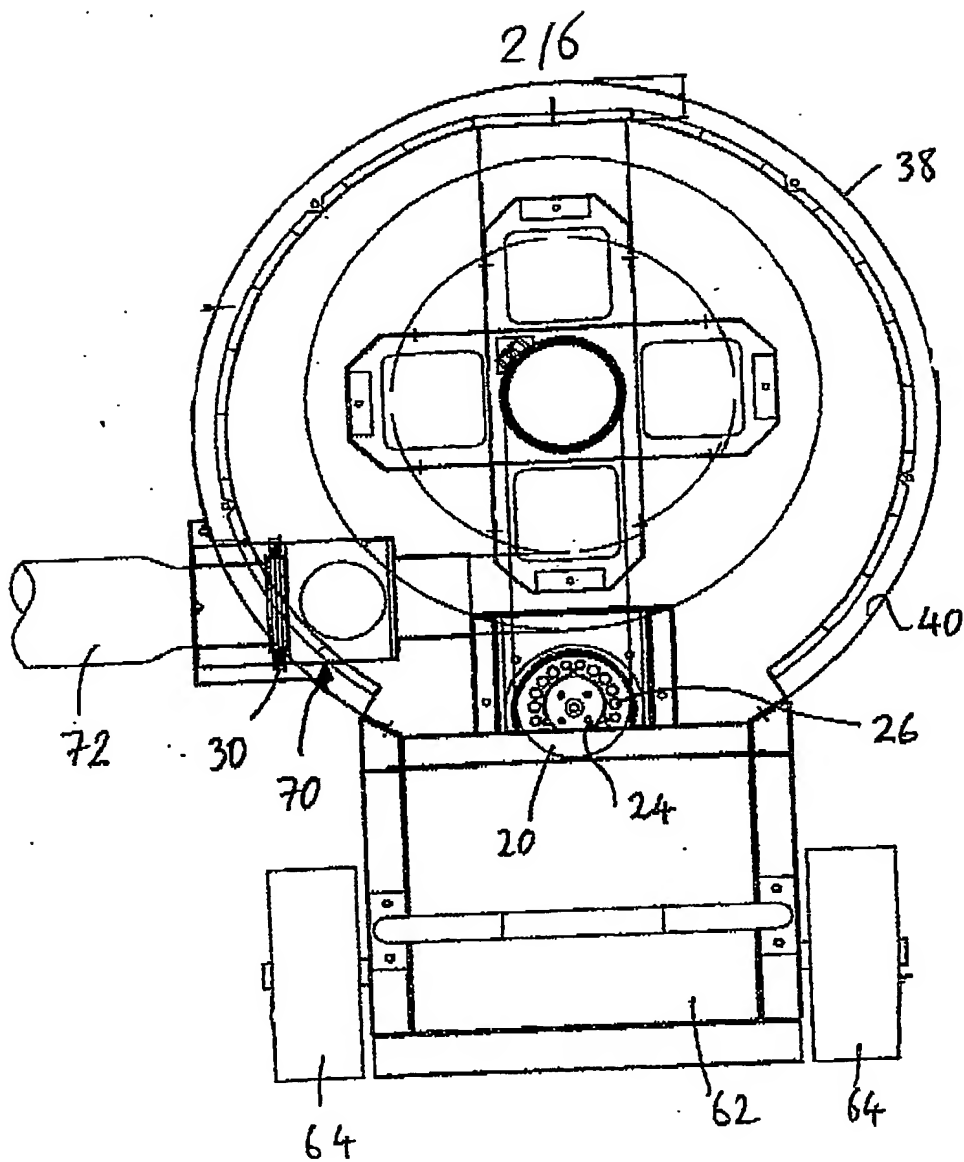


FIGURE 2

3/6

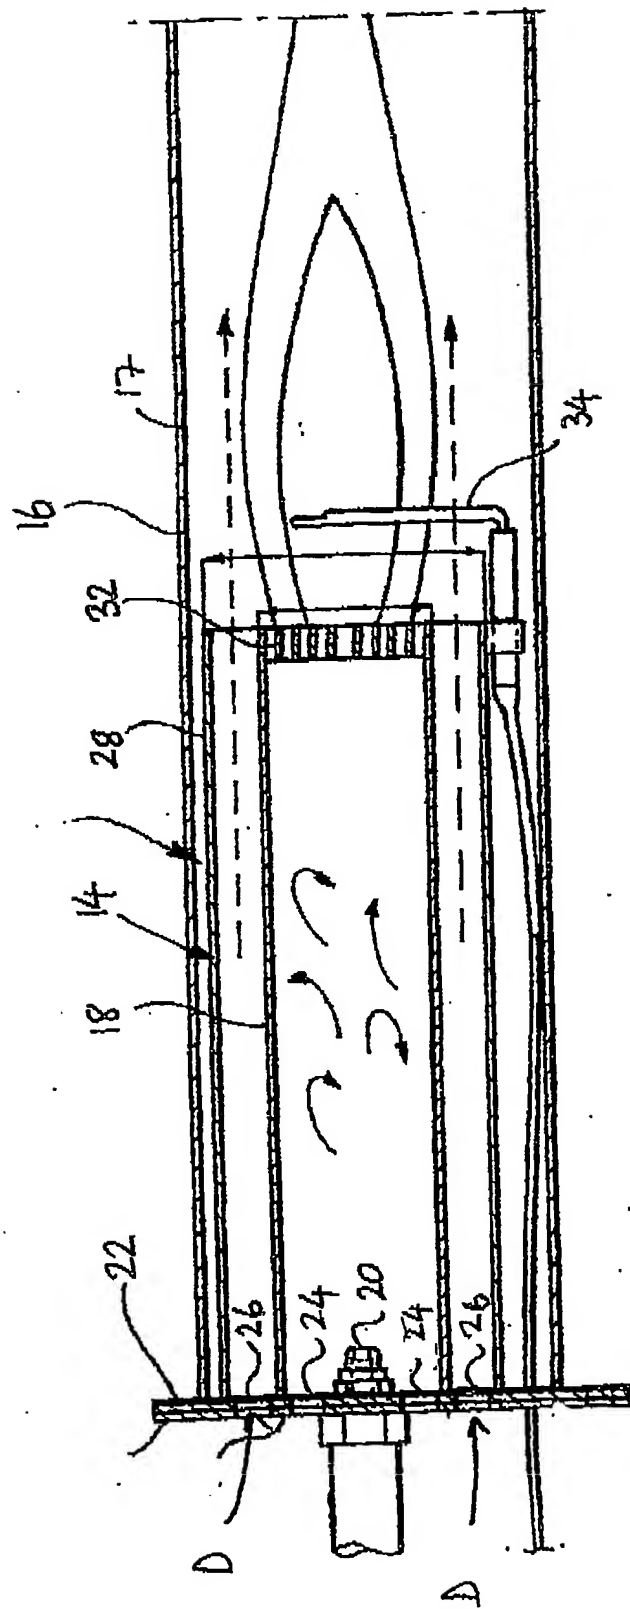


FIGURE 3



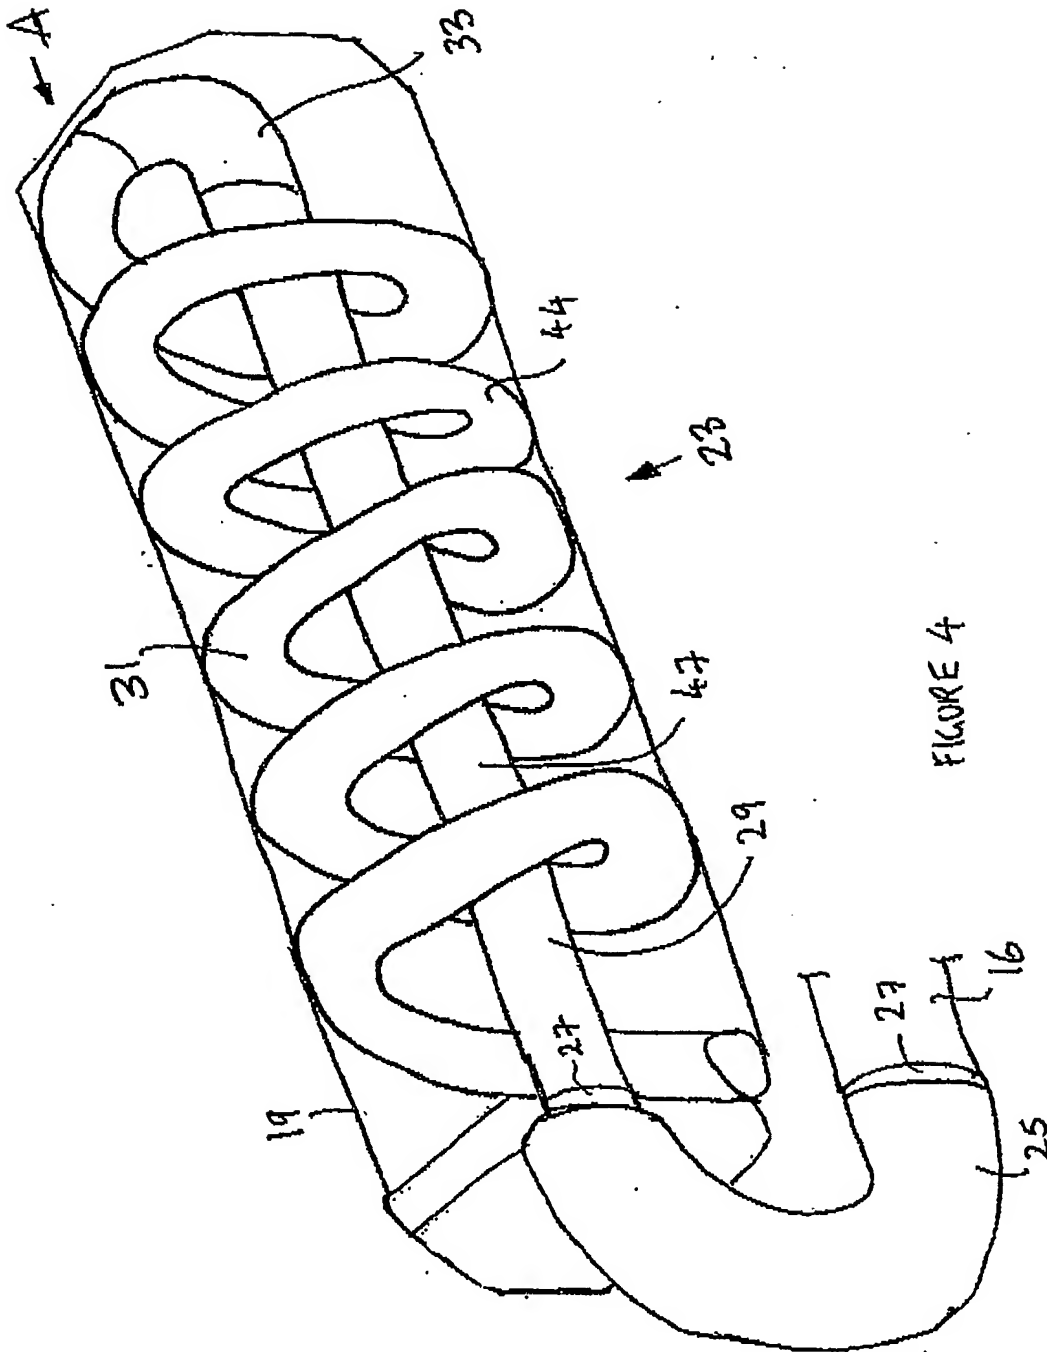


FIGURE 4

5/6

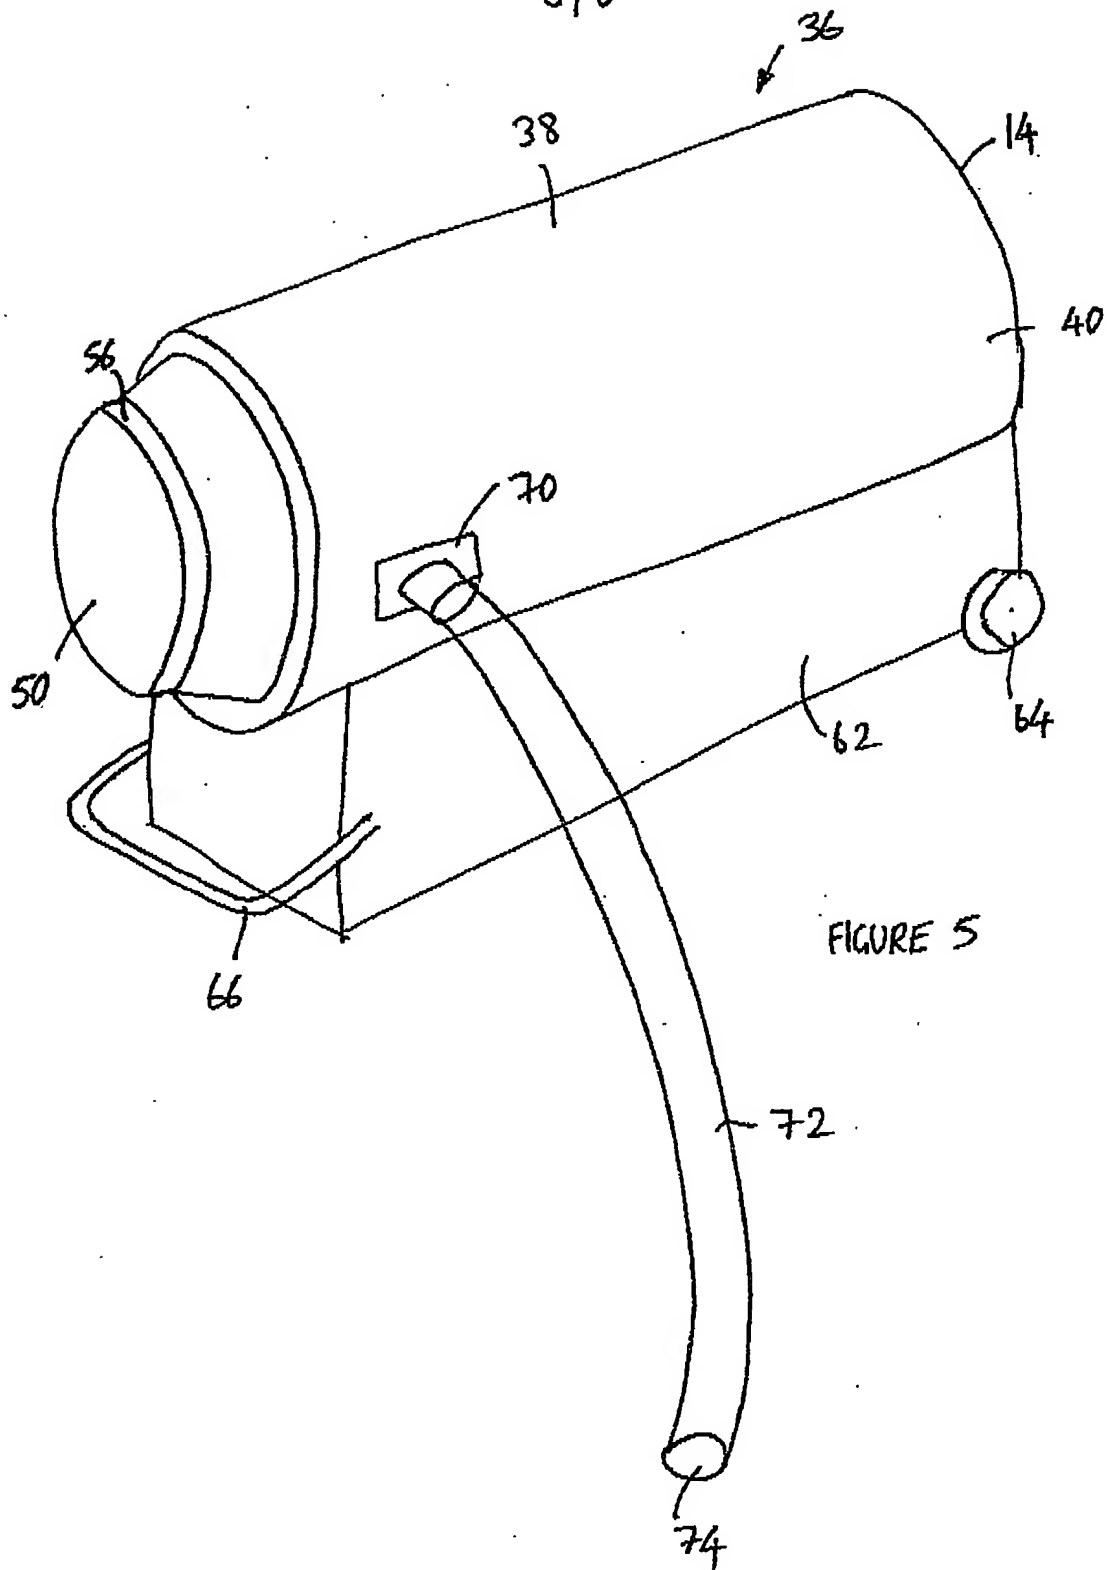


FIGURE 5

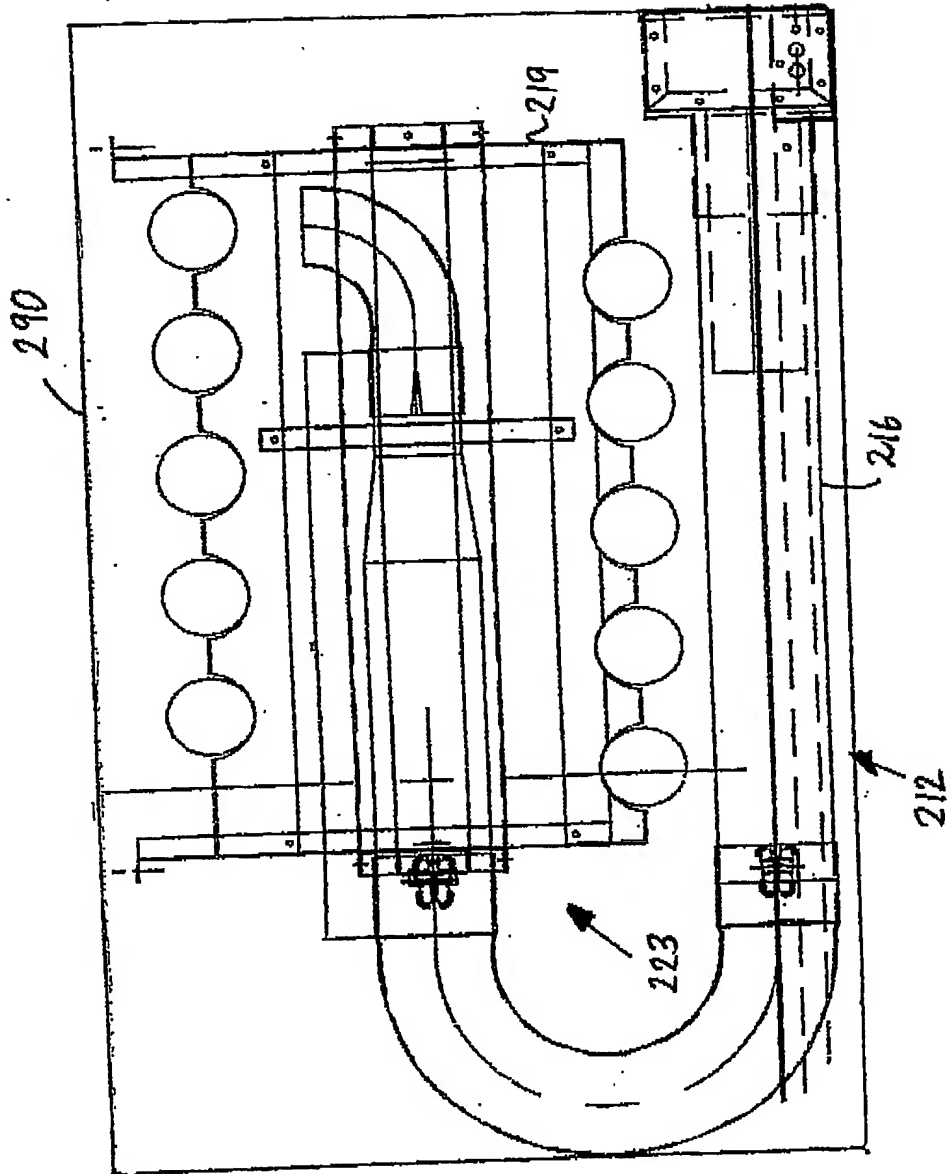


FIGURE 6

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**